

Stereo Tuner

TU-6200



FEATURES

■ Features


- ✚ 40 Memory presets (FM / AM)
- ✚ 10-key memory quick access
- ✚ Channel AUTO SCAN and manual tuning
- ✚ MONO / STEREO selection function (FM)
- ✚ Button operation beep ON / OFF
- ✚ Wide viewing angle VFD's screen

- ✚ Stereo type RCA and XLR (Neutrik) Output Jacks
- ✚ RS-232 serial remote control terminal
- ✚ Power switch
- ✚ Detachable IEC standard power connector (ground)
- ✚ Standard 2U chassis

■ Included accessories

- ✚ AC power cable
- ✚ AM (300Ω) loop antenna
- ✚ FM (75Ω) Antenna

DRAWING

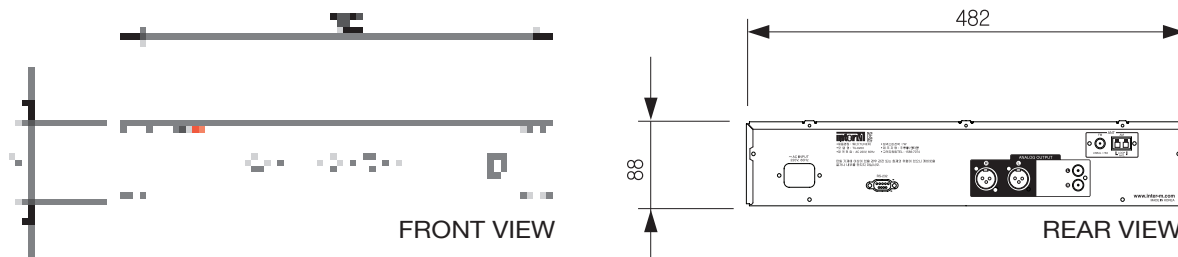

SPECIFICATIONS

FM (22,5kHz MOD, 1kHz)		Operation temperature	-10°C ~ +40°C / 14°F ~ 104°F
Tuning range	87,5~108,0MHz		
Sensitivity	2uV (Less than 10uV)	Power source	100~120VAC or 220~240VAC; 50/60Hz
T.H.D. (Mono)	0,2% (Less than 0,5%)		
S/N (Mono)	60dB (More than 50dB)	Power consumption	7W
Output level (75kHz MOD)	0dB±3 dB		
AM (30% MOD 400Hz)		Weight	4,2kg / 9,3lb
Tuning range	522~1629kHz		
Sensitivity	18uV (Less than 58uV)	Dimensions	482(W) x 88(H) x 280(D)mm 19(W) x 3,5(H) x 11(D)in
T.H.D. (Mono)	1% (Less than 2%)		
S/N (Mono)	50dB (More than 40dB)		
Output level (75kHz MOD)	-10dB±3 dB		

* Specifications and design are subject to change without notice.

interM

STEREO TUNER TU-6200


Stereo Tuner TU-6200



APPLICATION

■ 6000 system

– Audio and RS232 control connection of TU-6200 with 6000 system.

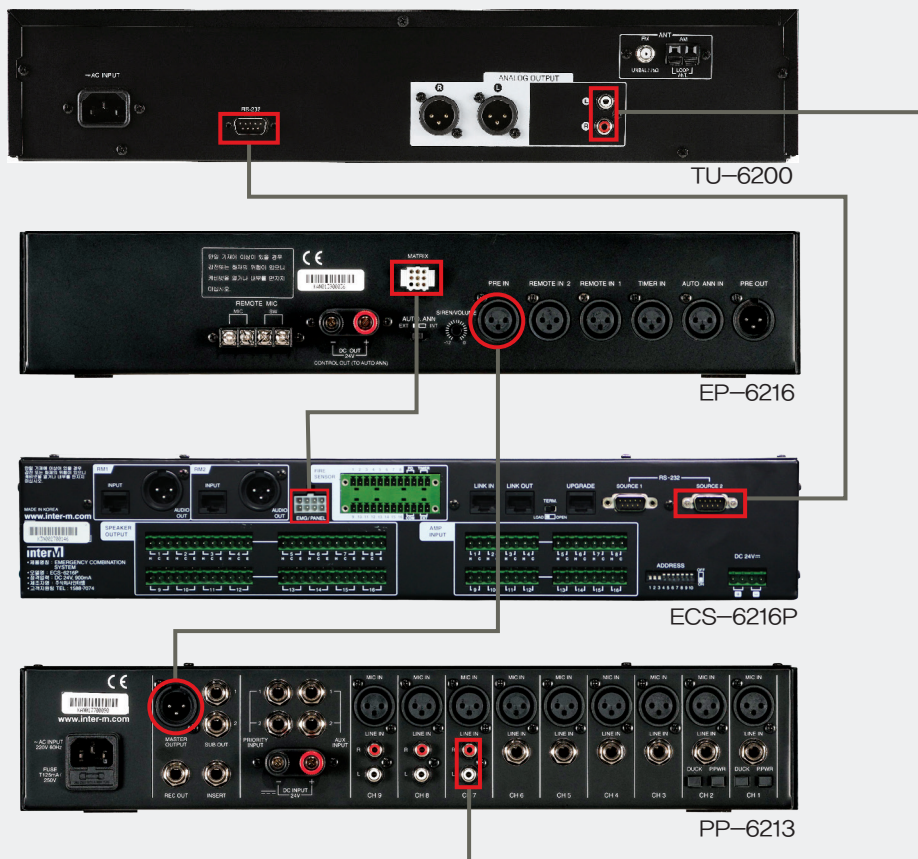

■ System 6000 Microsoft PC operation screen

– PC Control



Inter-M Corporation

- OFFICE: 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA
 - TEL : +82-2-2289-8140~8, FAX : +82-2-2289-8149
 - E-mail: overseas@inter-m.com

www.inter-m.com